


COLINES®

“Improve the life of your customers' products”

Choose a line made by a real expert in the whole technology

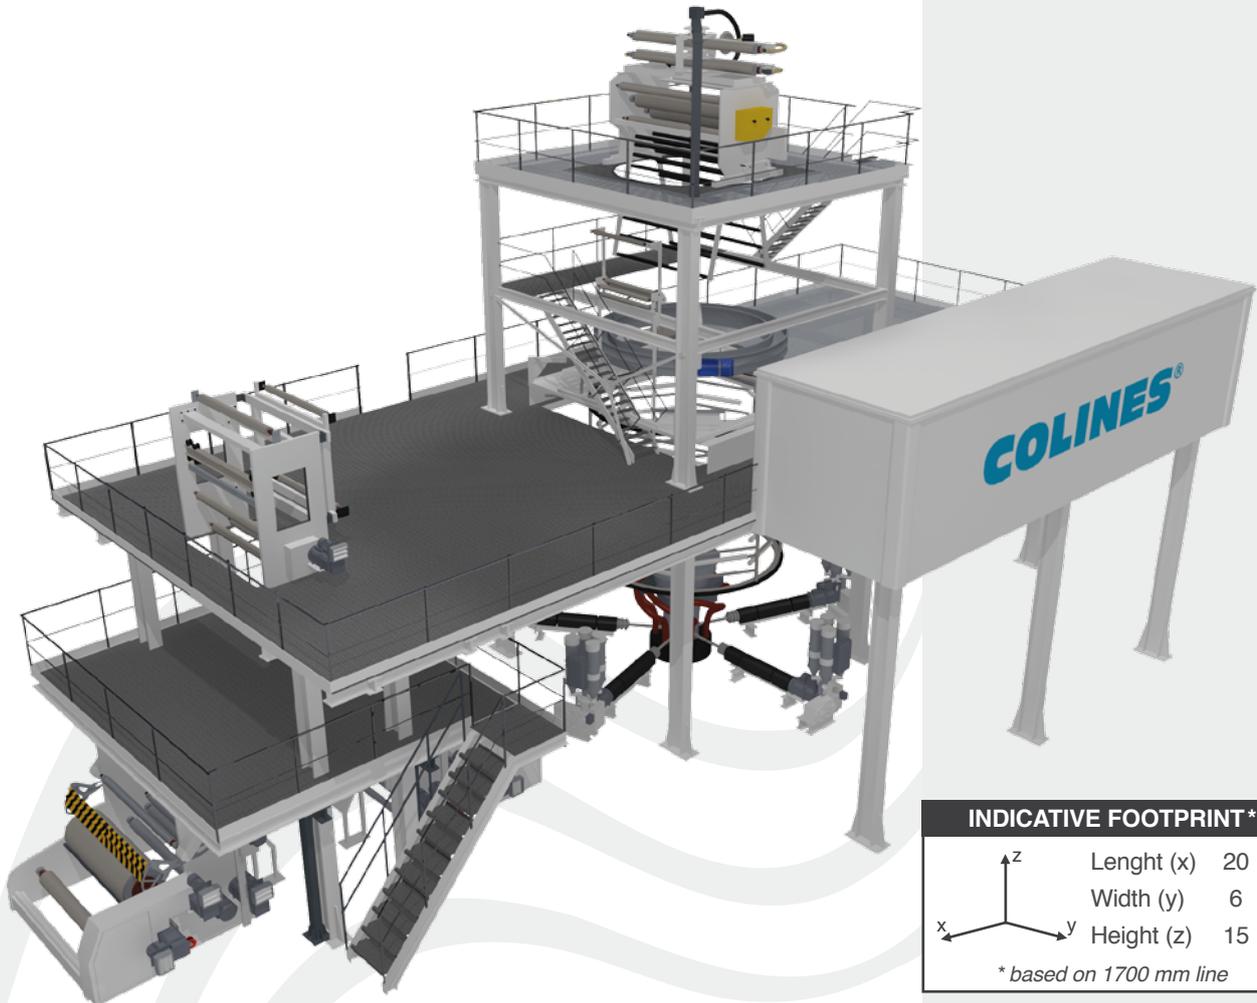

INDICATIVE FOOTPRINT*		
	Length (x)	20 m
	Width (y)	6 m
	Height (z)	15 m
* based on 1700 mm line		

Thanks to our process of verticalization (engineering and manufacturing of the lines + film production i.e. formulations and applications) we gained a comprehensive expertise in barrier film.

This is why we can guarantee excellence in engineering and reliability of the lines, a deep knowledge in raw materials, their combinations, film production and market demand, mainly in food, medical and pharma packaging, textile and hygienic fields.



**barrier
blown**®

Blown lines for barrier film



www.colines.it

info@colines.it



*More than 40 years
in the extrusion sector!*

Main technical data/features:

- Thickness 25÷200 μm
- Stratification up to 9 layers
- Raw materials: PE, PP, EVA, TL, EVOH, PA, PETg, PS and bio-based PLA, PVOH, etc
- Measuring device for total and barrier layers thickness
- Several non-radioactive systems for automatic thickness control



Electronic package

by www.elav.it

inb

HMI

work with
Smartphone
and Tablets



- HMI
- Inbox
- Live control
- Easy key
- Fast adjust
- Teleservice
- Videoservice
- Remote supervisor



N. 2 Touch screen Siemens Industrial PCs included as standard equipment



COLINES®

Colines® S.p.A. (Azzate Factory)

BarrierBlown® Division

Via 1° Maggio - 21022 Azzate (VA) - Italy

Ph. +39 0332 456401 - Fax +39 0332 456410

www.colines.it - info@colines.it



BarrierCast®

BarrierBlown®

Azzate factory

Crispi77.it

BB13EN01