


“Entry-level CPP extrusion system”

Compact line with limited investment cost

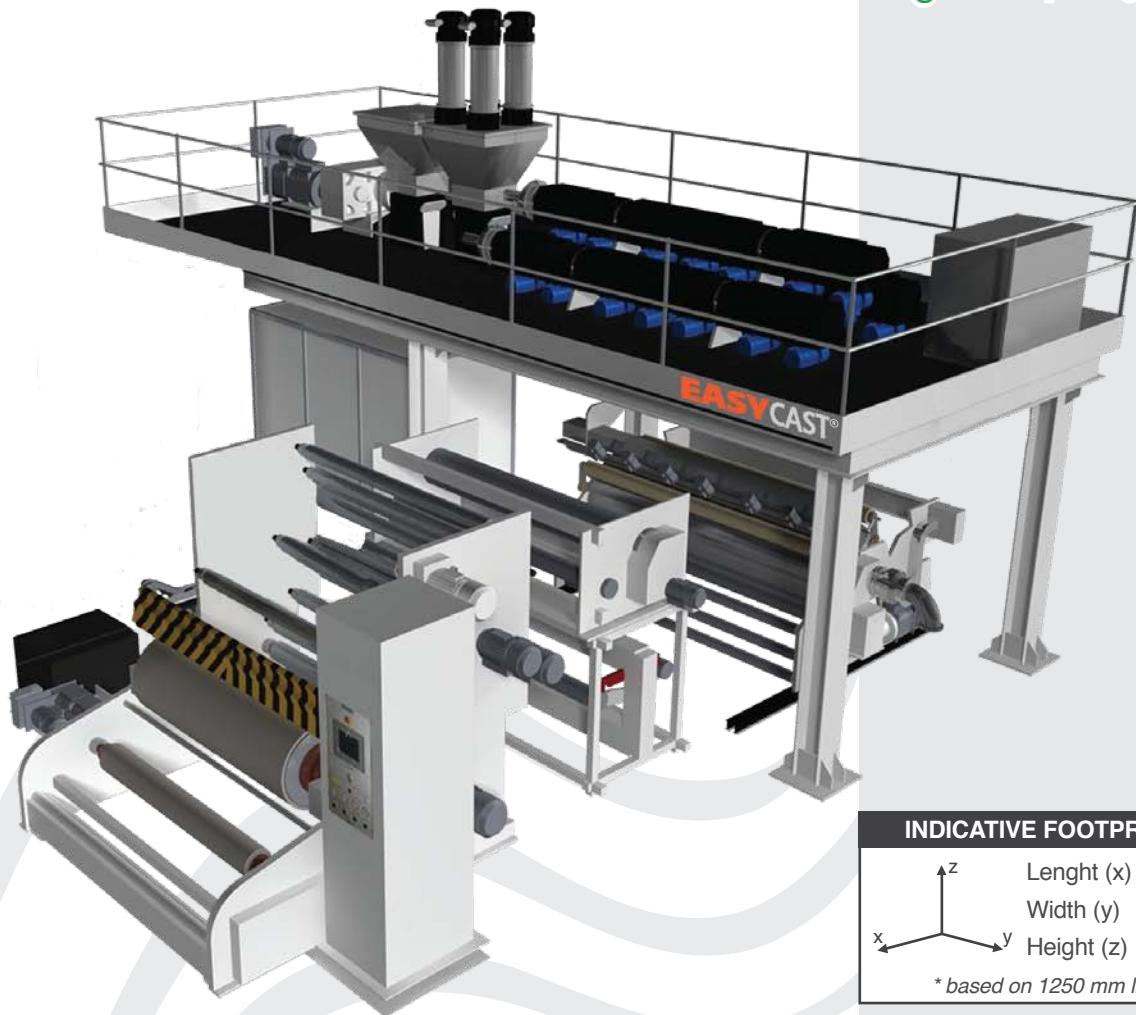

INDICATIVE FOOTPRINT*

	Length (x)	10,5 m
	Width (y)	9,75 m
	Height (z)	6,5 m

* based on 1250 mm line

Maximum quality and top reliability lines, equipped with sophisticated technical solutions coming from the direct film production experience. The EasyCast® lines guide you through the key steps for entering the CPP market in which COLINES® is the benchmark. These lines can produce:

- CPP and melt-embossed CPP film
- Film for bags and textiles
- Film for metallization
- Film for medical use
- Twist film for candies
- Film for food packaging lamination
- Film for dry products, freezer, deep-freezer and others



EASYCAST®

Cast lines for CPP film



COLINES®

Main technical data/features:

- Thickness 18÷200 µm
- Stratification up to 3 layers (standard)
- Net width up to 1500 mm (59")
- Net output up to 600 kg/h (1320 pph)
- Corona treatment
- Possible embossing unit on chill-roll
- Direct refeeding Big Mouth®
- Winding up to 1000 mm Ø with in-line slitting
- Easy-to-manage human machine interface



Electronic package

by www.elav.it

inb
HMI
work with
Smartphone
and Tablets

- HMI
- Inbox
- Live control
- Easy key
- Fast adjust
- Teleservice
- Videoservice
- Remote supervisor

N. 2 Touch screen Siemens Industrial PCs included as standard equipment

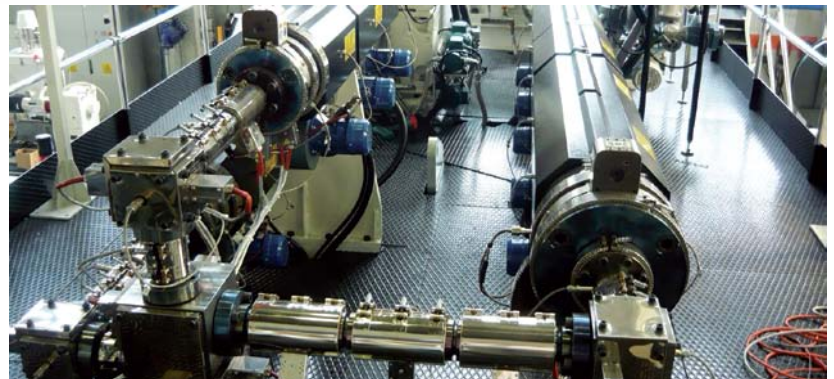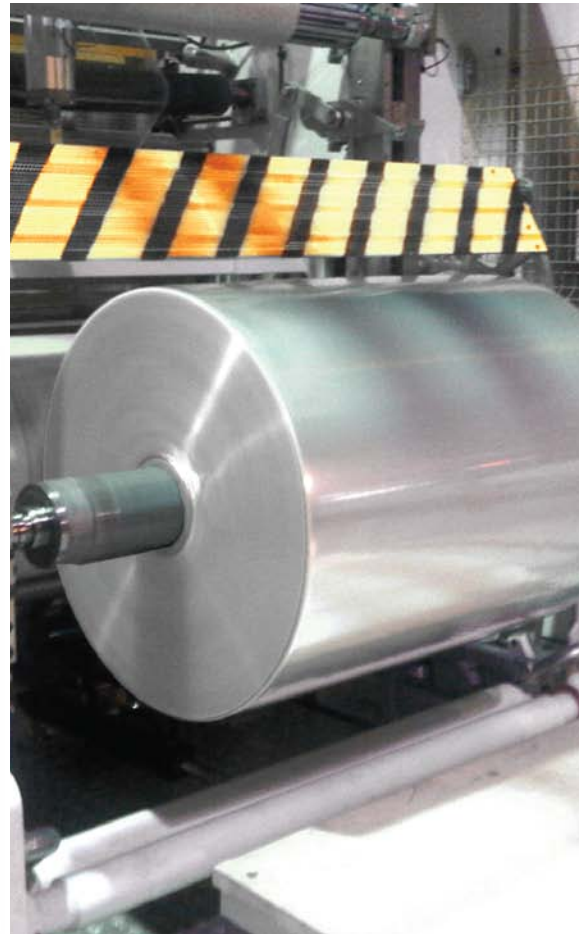

Bags and Textiles



Dry products




Lamination/
Metallization



Packaging of
candies



Stationery



COLINES®

Colines® S.p.A. (Azzate Factory)
EasyCast® Division
Via 1° Maggio - 21022 Azzate (VA) - Italy
Ph. +39 0332 456401 - Fax +39 0332 456410
www.colines.it - info@colines.it



PolyCast®

EasyCast®

UniCast®

Azzate factory