


COLINES®

“The right way through each
converting activity”

Choose the top technology available on the market

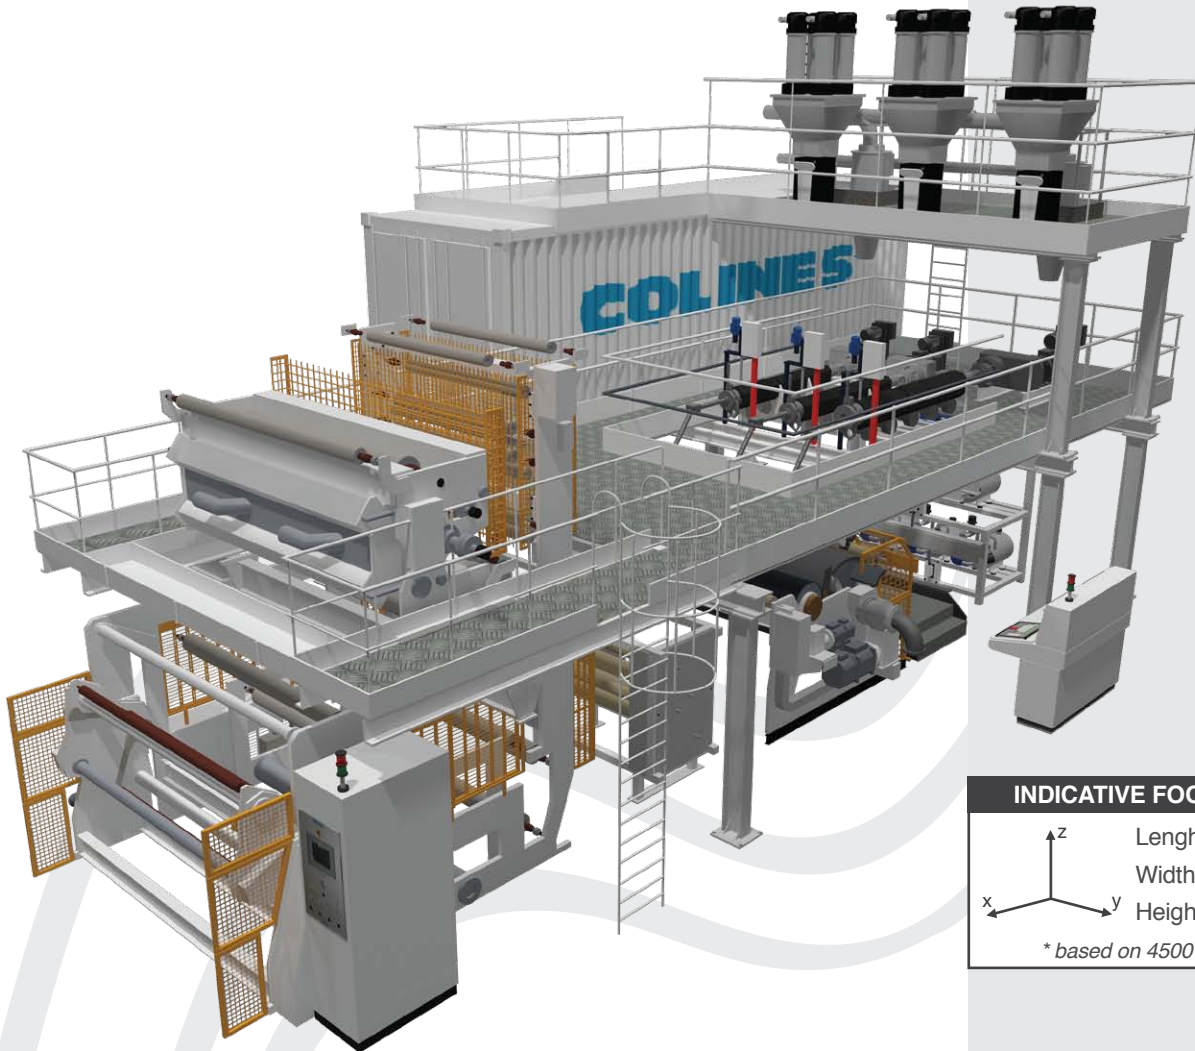

INDICATIVE FOOTPRINT*

| | | |
|--|------------|--------|
| | Length (x) | 24,5 m |
| | Width (y) | 8,5 m |
| | Height (z) | 6,5 m |

* based on 4500 mm line

Thanks to our process of verticalization (engineering and manufacturing of the lines + film production i.e. formulations and applications) we gained a comprehensive expertise in CPP film. This is why we can guarantee excellence in engineering and reliability of the lines, a deep knowledge in raw materials, their combinations, film production and market demand, mainly in food, medical, pharma, textile and hygienic fields. COLINES® technology is simply the benchmark in the market.



POLYCAST®

Cast lines for CPP film



www.colines.it
www.polycast.it

info@colines.it



*More than 40 years
in the extrusion sector!*

COLINES®

Main technical data/features:


- Up to Ø 1200 mm winding with possible in-line slitting
- Up to 6000 mm width (236")
- Stratification up to 5 layers
- Up to 3200 kg/h net output (7040 pph)
- In-line zero scraps cold refeeding system
- Thickness 15÷200 µm
- Top speed of 450 m/min
- Different types of film among others:
 - Sterilizable up to 134° C
 - Low sealing temperature in presence of liquid
 - Antistatic
 - Vacuum forming
 - Peelable
 - Twist
 - Metallizable
- Automatic/computerized storage rack for film ageing
- Thorough know-how on CPP packaging applications required by the market



Electronic package

by www.elav.it

- HMI
- Inbox
- Live control
- Easy key
- Fast adjust
- Teleservice
- Videoservice
- Remote supervisor

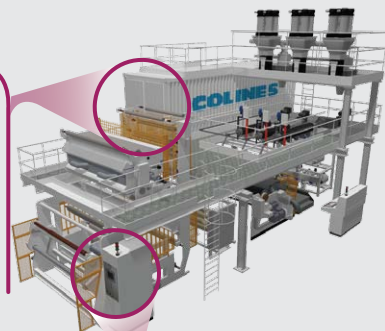

N. 2 Touch screen Siemens Industrial PCs included as standard equipment

inb
HMI
work with
Smartphone
and Tablets

Bags and Textiles

Dry products

Lamination/
Metallization

Pet food

Medical pouches

Packaging of
candies



COLINES®

Colines® S.p.A. (Novara Factory)
PolyCast® Division
Via Buonarroti, 27/29 - 28060 S.P. Mosezzo, Nibbia (NO) - Italy
Ph. +39 0321 486311 - Fax +39 0321 486355
www.colines.it - info@colines.it



Crisp177.it

PC13EN01

PolyCast®

EasyCast®

UniCast®

Novara factory